


Your Partner in Business



Creating Shared Value



Specialist for the Petroleum, Tank Storage, Surveying & Marine Industries

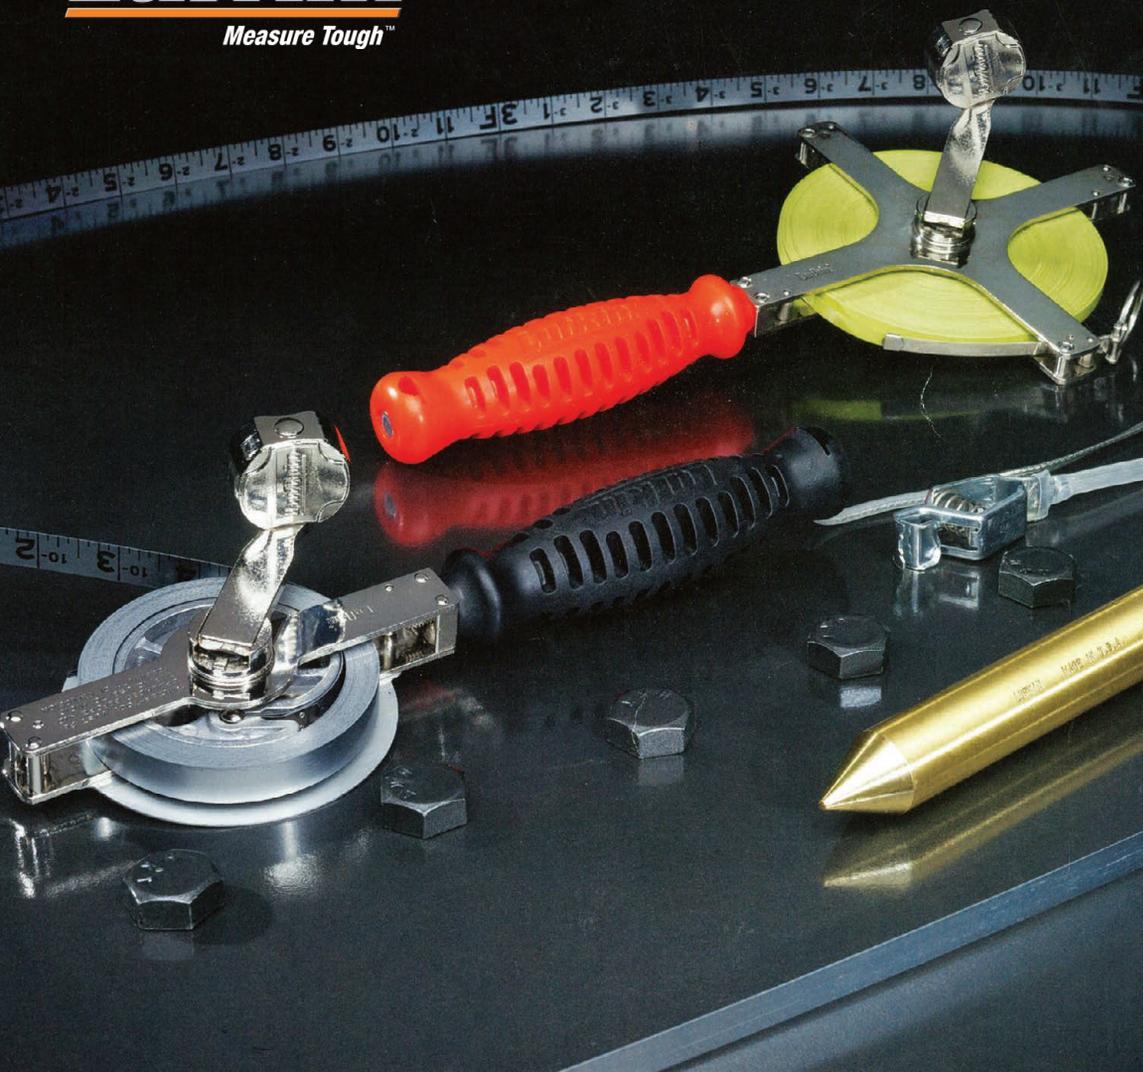

Lufkin Steel Tapes are made and stringently tested to government standards. Our bench standards for the United States are certified accurate by the United States Department of Commerce, N.I.S.T Tapes for Canada are made to Canadian Government Standards.

Lufkin Oil Gauging Tapes come complete with a grounding strap and an ESD(Electrostatic Discharge) handle, and are in full compliance with all current and proposed American Petroleum Institute Standards. Being a smart user is as important as using a quality gauging tape. Be sure to follow proper grounding techniques whenever you use an oil gauging tape. Ground your body. Ground your gear. Always use a grounding strap. Never remove the grounding strap, achieve a solid ground every time, and follow proper grounding procedures.

When Accuracy and Safety Matter Most..... **LUFKIN**

Lufkin



CAMPBELL CHAIN & FITTINGS



CRESCENT

148-Piece Professional Tool Set



2Pc. Tongue & Groove Pliers Set



- Unique Alloy Steel
- Induction Hardening
- Maximizes Durability

Rapidslide Adjustable Wrench




Crescent 2 in 1 Combo Linesman Pliers

- Unique design combines a lineman's plier and wire stripper in one tool
- Makes quick and efficient work of wire connections by performing both cutting and stripping operations
- Provides benefits of multi-purpose tool with the precision and performance of high quality pliers
- Redesigned dual material handle for comfort

STOFFEL SEALS®
Security Seal



Metal Truck Seal



Pull Tight Seal



Twist Seal



High Security Seal



Thumb Seal



Bullet Seal

PELICAN™



Explosion Proof Flashlights



2220 VB3™



2000 SabreLite™



2400 StealthLite™



2610 HeadsUp Lite™



2620 HeadsUp Lite™



WATERTIGHT LUGGAGE THAT DEFIES THE ELEMENTS

ELITE LUGGAGE



REMOTE AREA LIGHTS 9460RALS



PROTECTOR CASE™ 1500Medium Case



PROTECTOR CASE™ 1085CC Laptop Case

Swagelok



Snoop® and Real Cool Snoop liquid leak detectors detect gas leaks in hard-to-reach areas. Sustained bubble action works even on very small leaks and vertical surfaces. Flexible snoop tube extends for hard-to-reach areas. Does not contain chlorine, aliphatic amines, or ammonium compounds. Dries clean, without staining.

Wiss



Folding Pocket Knife

- Titanium Coating is 3X Harder than Steel for Longer Life
- Full Metal Frame for Increase Durability
- Spring Assisted Opening

NEW PRODUCT



AUTO-RETRACTING SAFETY UTILITY KNIFE

- Blade retracts automatically the moment it loses contact with the material being cut - even if the user is still holding the blade slider forward in the 'open' position
- Helps reduce workplace injuries, lowering lost time and increasing productivity

BWF Technologies

Single Gas Detector
Available in two years or three year versions, this single gas detector requires no calibration, sensor replacement, battery replacement or battery charging.

SIMPLE, EASY TO USE, MULTI-GAS WITH PUMP



H₂ CO O₂ SO₂

H₂ CO O₂ %LEL

Sampling Equipment & Accessories



Rock Bottom Sampler



Zone Sampler



Weighted Beaker



Sampling Cage



Explosion Proof Flashlights



HL 25 EX SET

Flexible-head safety lamp, compact in size, for installation in vehicles or buildings.

Enclosure Type	IP 67
Light time	5h
Lumen	170
Range	200m



ACCULUX EX SLE 16 LED SET

Working and emergency lamp incl. Charging station; for installation in vehicles or buildings.

Enclosure Type	IP 64
Light time	5h
Lumen	180
Range	170m



FOUR LED EX

Unique for hazardous areas: touch directly rechargeable at any 230 V-socket.

Enclosure Type	IP 65
Light time	12h
Lumen	45
Range	50m



HL 10 EX

Hand and helmet torch for almost every purpose: bright, shock - proof - waterproof depth 5 ml

Enclosure Type	IP 68
Light time	11h
Lumen	110
Range	150m



MHL 5 EX

Small-size torch: fits in every pocket; bright, shock-proof and -very good price-value!

Enclosure Type	IP 68
Light time	4h
Lumen	42
Range	30m




ANTI-STATIC SET



VISCO SAMPLER



LIQUI SAMPLER

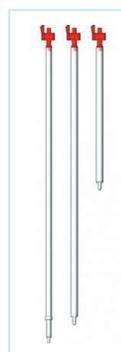

DIP SAMPLER



LIQUID-SAMPLER



BOTTLE-CARRIER



Glass Bottle / Tin / Plastic Bottle etc



1 Ltr White Coating (30pc-pkt)
Gallon Tin (10pcs-pkt)
Quart Tin (30pcs-pkt)
Quart Tin (30pc-pkt)



120ml Clear Bottle (140pc-ctn) 240ml Clear Bottle (120pc-ctn) 350ml Jam Jar (48pc-ctn) 500ml Clear Bottle (25pc-ctn) 1 Ltr Clear Bottle (12pc-ctn) 100ml Amber Bottle (140pc-ctn) 250ml Amber Bottle (48pc-ctn) 500ml Amber Bottle (24pc-ctn) 1 Ltr Amber Bottle (12pc-ctn) 1 Ltr Amber Bottle (12pc-ctn)



70ml Clear Jar (159pc-ctn) 250ml Plastic Bottle (100pcs-pkt) 340ml Clear Plastic Jar (100pcs-pkt) 500ml Plastic Bottle (100pcs-pkt) 1 Ltr Plastic Bottle (50pc-pkt) 1 Ltr Plastic Bottle (60pc-pkt) 2 Ltr Plastic Bottle (30pcs-pkt) 2 Ltr Plastic Bottle (30pcs-pkt) 5 Ltr Plastic Bottle (25pc-pkt) 10 Ltr Plastic Bottle (15pc-pkt) 5 Ltr & 10 Ltr Cubitainer (30pc-ctn)



Made in Japan

Designed for Light
Gage Materials 0.8mm
to 200mm with 0.1mm
Accuracy

AD-3253

Ultrasonic Thickness Gage

Low Cost & High Technology



- Compact & Light weight - 180g
- Easy to operate, Auto power off
- Stored Memory
- Applications - Thickness Measurement, Corrosion Test, Inspection.
- Sample - Steel, Cast iron, Titanium, Aluminium, Copper, Brass, Glass, Plastic, etc.

NIHON DOKI




White



Black



Stainless

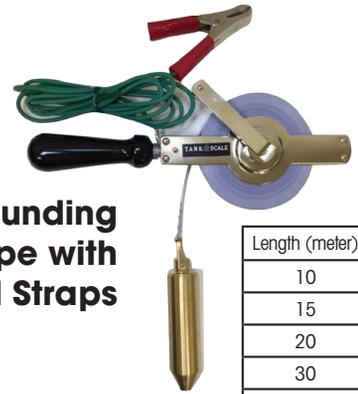


Oil Sounding Tape with Ground Straps

Length (meter)
10
15
20
30
40

YAMAYO®

MEASURING & NDT INSTRUMENTS



Fibre glass rope and tape



CREWFIT 165^{SPORT}

COMFORT. STYLE. PERFORMANCE.



UNIQUE CHIN
SUPPORT



PROVIDES 165N
OF BUOYANCY



QUICK BURST
ZIP



VERNON MORRIS

VM Hydrant Flow Gauge & Mains Testing Outfit




Made in UK



Tested by the British Hydromechanics Research Association, this equipment is indispensable for water supply planning and fire protection.

Standard equipment in the water industry, fire brigades, sprinkler and insurance companies, hospitals, etc.

The VM Hydrant Flow Gauge is universally used by Water Engineers and Fire Service Authorities in the appraisal of piped water supply for fire fighting, development planning, and as a probe for investigating the ageing conditions of water mains and the consequence of overloading. In all of these applications, there is no better cost effective substitute.

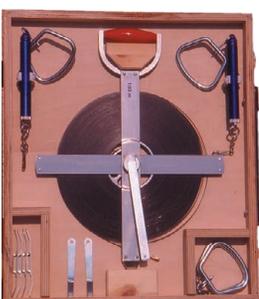

Callaway

Length : 50,100
150,200 meter



Made in Germany

Special Steel Measuring Tapes for Tank Strapping

These narrow measuring tapes are specially used for the calibration of storage tanks for oil or other liquids. The accessories allow easy positioning of the measuring tape at the tank and the right tension during measurement give the possibility to get exact measurements.

"The analysis is only as good as the sample!"



SPOT LEVEL SAMPLERS - ALS 1002



RUNNING SAMPLERS - ALSB 1L



ANY-LEVEL & BOTTOM SAMPLER



FREE WATER FINDING RULE IP M14



BTMS 102 BOTTOM SAMPLER



ATEX MK 1A WINDER 30M ST/ST CABLE, WIPER & DEPTH COUNTER



Save Time



Reduces Cost



Quality Samples



Avoids Hassles



Reduces Effort



Reduces Risk



Organizes

ATEX APPROVED MK 7 CLOSED SAMPLING SYSTEM (2-INCH)



MK7 Winder Suitable for MMC/Hermatic



The complete kit in its storage/transit case



Backpack provided



Running Sampler



Sampling Rod



Bottom Sampler




Spot Sampler

This system meets the need for taking accurate samples of cargoes under closed conditions, and where sample sizes of up to 500 ml are required.

KOLOR KUT
WATER FINDING PASTE



KESSLER

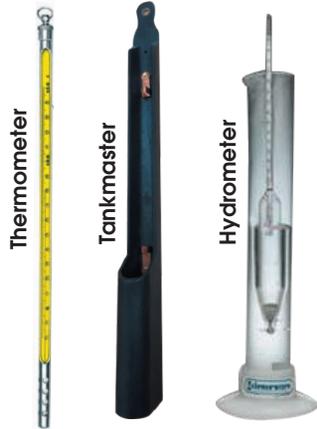

ThermoProbe

Intrinsically Safe Portable Petroleum Gauging Thermometer for Cargo Inspection in Hazardous locations.

Temperature Range :
-40°C to 204°C
Length available 15m - 40m

TP7-C




Designed with reliable RTD sensors, automatic backlight feature, AA batteries, providing up to 200 hours of operation. Rugged instrument body is constructed from aluminium and polypropylene components.

MMC



Portable Closed/ Gas-tight Gauging and Sampling

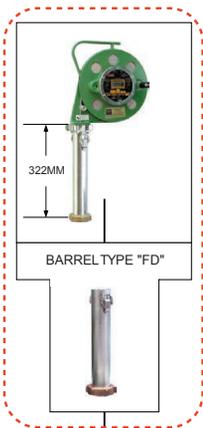

Standard Length : 30m

TP9

Length available 15m - 30m



The ergonomic probe storage and stainless construction is well suited for gauging heavy products that are hard to clean such as Asphalt.

Precision Intrinsically safe portable stem thermometer for laboratory and field reference. Resolution 0.01 Degrees. TLIR Resolution : 0.001 Degree.

Temperature Range :
-40°C to 204°C

TL1-A



TL1-W



TL1-R



PetroView

Multi-Function Sampling System For Restricted & Closed Tank Applications



Eva Petro-Marine formely known as Eva Hardware & Machinery, was established in January 1983. We have changed our company name in 2006 in line of our focusing on Petroleum & Marine Industires.

We are stockist and exclusive Agent / Distributor of many U.S.A, Germany, Japan & United Kingdom products and equipment for Asean countries. We have more than 30-years in supplpying consumable products such as Glass, Plastic, Tins containers, Thermometers, Hydrometers, Security Seal, Surveying & Sampling Equipment, Oil Gauging, Tank Strapping & Engineering Tapes and many more.



Intrinsically Safe Petrochemical Gauging Thermometer



API Oil Gauging & Measuring Tape



Water & Oil Finding Paste



UK Sampling Gauges Ltd
Closed Sampling System
The analysis is only as good as the sample



ASTM Thermormeter & Hydrometer



The original & still the best



Snoop liquid leak detectors



Explosion-Proof Lamps



Sampling Equipment



Petroleum Testing Equipment



Measuring Tools
>> since 1920 <<



Precision, performance, durability



Flashlights & Cases



The Safety Company



Thermormeter & Hydrometer



Tri-mode Portable Tank Gauging



Industrial Adhesives & Tapes



Security Seal



Oil Gauging & tank Strapping



Ultrasonic Thickness Gage



MEASURING & NDT INSTRUMENTS
Fiber glass tape & rope

PetroView
Closed Sampling Units



Crewsaver
Automatic Life Jackets



Air Sea UN tins



Flow Gauges & Equipment



Gas Detector



Sounding Tape



EVA PETRO-MARINE PTE LTD

2 Jurong East Street 21, #02-185, IMM Building, Singapore 609601

T (65) 6777 7778 F (65) 6778 9270 E sales@evapetromarine.com W www.evapetromarine.com

Creating Shared Value